


• NOHA MODEL 3

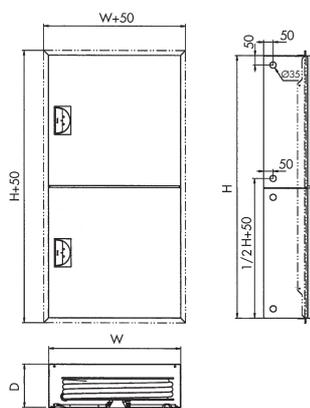

NOHA FIRE HOSE REEL AND VERTICAL COMBINED CABINET WITH EQUIPMENT COMPARTMENT, FOR WALL-MOUNTING OR RECESS-MOUNTING

Hose reel mounted on the door which opens 180°. The reel can easily be removed from the cabinet to facilitate the installation.

For use in office buildings, schools, hospitals, kindergartens, sports arenas, cinemas, hotels and conference centres, airports and shopping centres.

NOHA MODEL 3 IS CE-MARKED ACCORDING TO EN671-1 AND SUPPLIED WITH:

- Hose reel with side discs powder coated RAL 3001 red gloss 15
- 1" manual stop valve
- NOHA quick-change coupling system on reel outlet
- NOHA jet/spray/shut-off nozzle
- NOHA special black hose, designed to standard EN694 for fire hose reels
- NOHA special supply hose
- Centre parts made of brass
- Adjustable brake
- Hinges on right hand side
- NOHA door catches/release handles
- Ø35 mm knockouts for inlet pipework on 3 sides
- Removable back walls, made of galvanized steel; can be used as a mounting template
- Cabinet, except back walls, powder coated RAL 9010 white gloss 15
- Door signs in accordance with Council Directive 92/58/EEC
- NOHA installation instructions


Model	Hose length in metres		Dimensions in mm W x H x D	Order number
	19 mm	25 mm		
3	20		695 x 1400 x 230	560050
3	25		695 x 1400 x 230	560049
3	30		695 x 1400 x 230	560024
3		20	695 x 1400 x 285	560051
3		25	695 x 1400 x 285	560052
3		30	695 x 1400 x 285	560053
Trim frame for recess-mounting			695 x 1400	555318

OPTIONS

- Cabinet RAL 3001 red
- Cabinet RAL ____ (smooth surface gloss 70)
- Hose reel door for manual call point
- Hinges on left hand side
- Red hose
- Light hose



• NOHA MODEL 3A

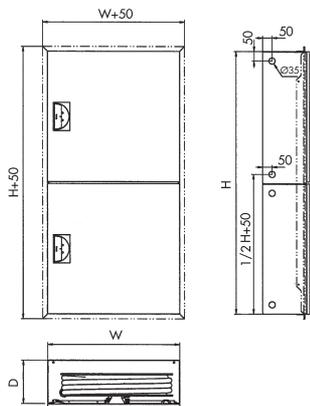

NOHA FIRE HOSE REEL WITH AUTOMATIC STOP VALVE AND VERTICAL COMBINED CABINET WITH EQUIPMENT COMPARTMENT, FOR WALL-MOUNTING OR RECESS-MOUNTING

Hose reel mounted on the door which opens 180°. The reel can easily be removed from the cabinet to facilitate the installation. The automatic stop valve opens to provide full capacity within just two revolutions of the reel.

For use in office buildings, schools, hospitals, kindergartens, sports arenas, cinemas, hotels and conference centres, airports and shopping centres.

NOHA MODEL 3A IS CE-MARKED ACCORDING TO EN671-1 AND SUPPLIED WITH:

- Hose reel with side discs powder coated RAL 3001 red gloss 15
- Integrated NOHA automatic stop valve
- NOHA quick-change coupling system on reel outlet
- NOHA jet/spray/shut-off nozzle
- NOHA special black hose, designed to standard EN694 for fire hose reels
- NOHA special supply hose
- Centre parts made of brass
- Adjustable brake
- Hinges on right hand side
- NOHA door catches/release handles
- Ø35 mm knockouts for inlet pipework on 3 sides
- Removable back walls, made of galvanized steel; can be used as a mounting template
- Cabinet, except back walls, powder coated RAL 9010 white gloss 15
- Door signs in accordance with Council Directive 92/58/EEC
- NOHA installation instructions


Model	Hose length in metres		Dimensions in mm W x H x D	Order number
	19 mm	25 mm		
3A	20		695 x 1400 x 230	555312
3A	25		695 x 1400 x 230	555313
3A	30		695 x 1400 x 230	555314
3A		20	695 x 1400 x 285	555315
3A		25	695 x 1400 x 285	555316
3A		30	695 x 1400 x 285	555317
Trim frame for recess-mounting			695 x 1400	555318

OPTIONS

- Cabinet RAL 3001 red
- Cabinet RAL ____ (smooth surface gloss 70)
- Hose reel door for manual call point
- Hinges on left hand side
- Red hose
- Light hose



• NOHA MODEL 3SW

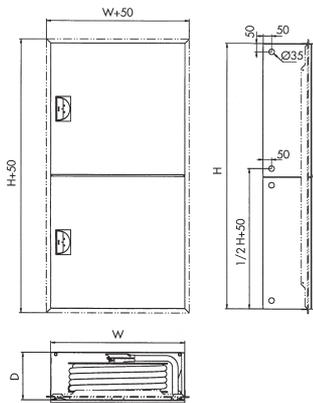

NOHA SWINGING FIRE HOSE REEL AND VERTICAL COMBINED CABINET WITH EQUIPMENT COMPARTMENT FOR WALL/ RECESS-MOUNTING

Hose reel mounted on a swinging arm with internal waterways which swings 180°. The hose reel can easily be removed from the cabinet to facilitate the installation.

For use in office buildings, schools, hospitals, kindergartens, sports arenas, cinemas, hotels and conference centres, airports and shopping centres.

NOHA MODEL 3SW IS CE-MARKED ACCORDING TO EN671-1 AND SUPPLIED WITH:

- Hose reel with side discs powder coated RAL 3001 red gloss 15
- 1" manual stop valve
- NOHA quick-change coupling system on reel outlet
- NOHA jet/spray/shut-off nozzle
- NOHA special black hose, designed to standard EN694 for fire hose reels
- NOHA swinging arm with internal waterways
- Centre parts made of brass
- Adjustable brake
- Hinges on right hand side
- NOHA door catches/release handles
- Ø35 mm knockouts for inlet pipework on 3 sides
- Removable back walls, made of galvanized steel; can be used as a mounting template
- Cabinet, except back walls, powder coated RAL 9010 white gloss 15
- Door signs in accordance with Council Directive 92/58/EEC
- NOHA installation instructions


Model	Hose length in metres		Dimensions in mm W x H x D	Order number
	19 mm	25 mm		
3SW	20		795 x 1600 x 230	560054
3SW	25		795 x 1600 x 230	560055
3SW	30		795 x 1600 x 230	560056
3SW		20	795 x 1600 x 285	560057
3SW		25	795 x 1600 x 285	560058
3SW		30	795 x 1600 x 285	560059
Trim frame for recess-mounting			795 x 1600	555325

OPTIONS

- Cabinet RAL 3001 red
- Cabinet RAL ____ (smooth surface gloss 70)
- Doors for vision panels
- Hose reel door for manual call point
- Hinges on left hand side
- Red hose
- Light hose



• NOHA MODEL 3SWA

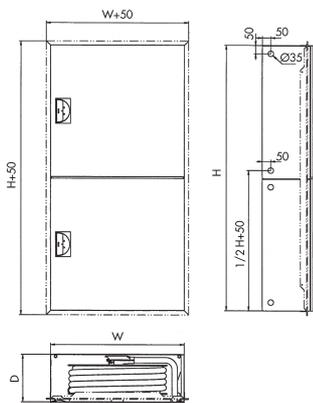

NOHA SWINGING FIRE HOSE REEL WITH AUTOMATIC STOP VALVE AND VERTICAL COMBINED CABINET WITH EQUIPMENT COMPARTMENT FOR WALL-/RECESS-MOUNTING

Hose reel mounted on a swinging arm with internal waterways which swings 180°. The hose reel can easily be removed from the cabinet to facilitate the installation. The automatic stop valve opens to provide full capacity within just two revolutions of the reel.

For use in office buildings, schools, hospitals, kindergartens, sports arenas, cinemas, hotels and conference centres, airports and shopping centres.

MODEL 3SWA IS CE-MARKED ACCORDING TO EN671-1 AND SUPPLIED WITH:

- Hose reel with side discs powder coated RAL 3001 red gloss 15
- Integrated NOHA automatic stop valve
- NOHA quick-change coupling system on reel outlet
- NOHA jet/spray/shut-off nozzle
- NOHA special black hose, designed to standard EN694 for fire hose reels
- NOHA swinging arm with internal waterways
- Centre parts made of brass
- Adjustable brake
- Hinges on right hand side
- NOHA door catches/release handles
- Ø35 mm knockouts for inlet pipework on 3 sides
- Removable back walls, made of galvanized steel; can be used as a mounting template
- Cabinet, except back walls, powder coated RAL 9010 white gloss 15
- Door signs in accordance with Council Directive 92/58/EEC
- NOHA installation instructions

Model	Hose length in metres		Dimensions in mm W x H x D	Order number
	19 mm	25 mm		
3SWA	20		795 x 1600 x 230	555319
3SWA	25		795 x 1600 x 230	555320
3SWA	30		795 x 1600 x 230	555321
3SWA		20	795 x 1600 x 285	555322
3SWA		25	795 x 1600 x 285	555323
3SWA		30	795 x 1600 x 285	555324
Trim frame for recess-mounting			795 x 1600	555325

OPTIONS

- Cabinet RAL 3001 red
- Cabinet RAL ____ (smooth surface gloss 70)
- Doors for vision panels
- Hose reel door for manual call point
- Hinges on left hand side
- Red hose
- Light hose

