


• NOHA MODEL 31 SST

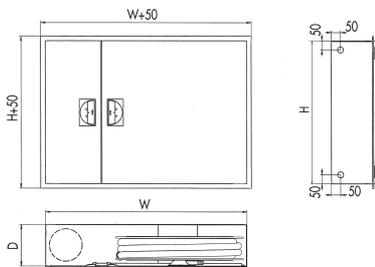

NOHA FIRE HOSE REEL AND CABINET WITH EQUIPMENT COMPARTMENT FOR RECESS-MOUNTING, DOOR AND FRAME BRUSHED STAINLESS STEEL

Hose reel mounted behind the door on a swivel plate which opens 180°. The reel can easily be removed to facilitate the installation.

For use in office buildings, schools, hospitals, kindergartens, sports arenas, cinemas, hotels and conference centres, airports and shopping centres.

NOHA MODEL 31 SST IS CE-MARKED ACCORDING TO EN671-1 AND SUPPLIED WITH:

- Hose reel with side discs powder coated RAL 3001 red gloss 15
- 1" manual stop valve
- NOHA quick-change coupling system on reel outlet
- NOHA jet/spray/shut-off nozzle
- NOHA special black hose, designed to standard EN694 for fire hose reels
- NOHA special supply hose
- Centre parts made of brass
- Adjustable brake
- Hinges on right hand side
- Doors and frame brushed stainless steel
- NOHA door catches/release handles
- Ø35 mm knockouts for inlet pipework on 3 sides
- Removable back wall, made of galvanized steel; can be used as a mounting template
- Cabinet, except back wall, powder coated RAL 9010 white gloss 15
- Double 45° wall sign in accordance with Council Directive 92/58/EEC
- NOHA installation instructions


Model	Hose length in metres		Dimensions in mm W x H x D	Order number
	19 mm	25 mm		
31 SST	20		1105 x 795 x 230	555128
31 SST	25		1105 x 795 x 230	555129
31 SST	30		1105 x 795 x 230	555130
31 SST		20	1105 x 795 x 230	555131
31 SST		25	1105 x 795 x 230	555132
31 SST		30	1105 x 795 x 230	555133

OPTIONS

- Doors and frame polished stainless steel
- Compartment door for manual call point
- Hinges on left hand side
- Red hose
- Light hose



• NOHA MODEL 31A SST

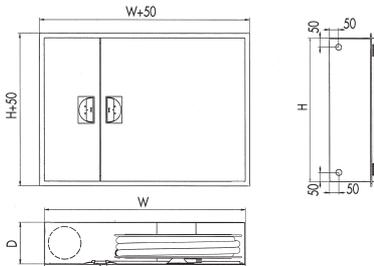

NOHA FIRE HOSE REEL WITH AUTOMATIC STOP VALVE AND CABINET WITH EQUIPMENT COMPARTMENT FOR RECESS-MOUNTING, DOOR AND FRAME BRUSHED STAINLESS STEEL

Hose reel mounted behind the door on a swivel plate which opens 180°. The reel can easily be removed to facilitate the installation. The automatic stop valve opens to provide full capacity within just two revolutions of the reel.

For use in office buildings, schools, hospitals, kindergartens, sports arenas, cinemas, hotels and conference centres, airports and shopping centres.

NOHA MODEL 31A SST IS CE-MARKED ACCORDING TO EN671-1 AND SUPPLIED WITH:

- Hose reel with side discs powder coated RAL 3001 red gloss 15
- Integrated NOHA automatic stop valve
- NOHA quick-change coupling system on reel outlet
- NOHA jet/spray/shut-off nozzle
- NOHA special black hose, designed to standard EN694 for fire hose reels
- NOHA special supply hose
- Centre parts made of brass
- Adjustable brake
- Hinges on right hand side
- Doors and frame brushed stainless steel
- NOHA door catches/release handles
- Ø35 mm knockouts for inlet pipework on 3 sides
- Removable back wall, made of galvanized steel; can be used as a mounting template
- Cabinet, except back wall, powder coated RAL 9010 white gloss 15
- Double 45° wall sign in accordance with Council Directive 92/58/EEC
- NOHA installation instructions


Model	Hose length in metres		Dimensions in mm W x H x D	Order number
	19 mm	25 mm		
31A SST	20		1105 x 795 x 230	555134
31A SST	25		1105 x 795 x 230	555135
31A SST	30		1105 x 795 x 230	555136
31A SST		20	1105 x 795 x 230	555137
31A SST		25	1105 x 795 x 230	555138
31A SST		30	1105 x 795 x 230	555139

OPTIONS

- Doors and frame polished stainless steel
- Compartment door for manual call point
- Hinges on left hand side
- Red hose
- Light hose



• NOHA MODEL 31SW SST

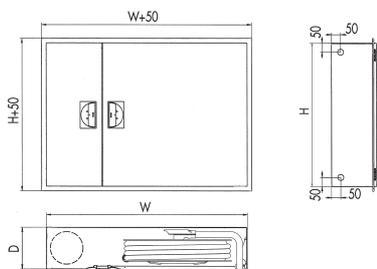

NOHA SWINGING FIRE HOSE REEL AND CABINET WITH EQUIPMENT COMPARTMENT FOR RECESS-MOUNTING, DOOR AND FRAME BRUSHED STAINLESS STEEL

Hose reel mounted on a swinging arm with internal waterways which swings 180°. The reel can easily be removed from the cabinet to facilitate the installation.

For use in office buildings, schools, hospitals, kindergartens, sports arenas, cinemas, hotels and conference centres, airports and shopping centres.

NOHA MODEL 31SW SST IS CE-MARKED ACCORDING TO EN671-1 AND SUPPLIED WITH:

- Hose reel with side discs powder coated RAL 3001 red gloss 15
- 1" manual stop valve
- NOHA quick-change coupling system on reel outlet
- NOHA jet/spray/shut-off nozzle
- NOHA special black hose, designed to standard EN694 for fire hose reels
- NOHA swinging arm with internal waterways
- Centre parts made of brass
- Adjustable brake
- Hinges on right hand side
- Doors and frame brushed stainless steel
- NOHA door catches/release handles
- Ø35 mm knockouts for inlet pipework on 3 sides
- Removable back wall, made of galvanized steel; can be used as a mounting template
- Cabinet and back wall powder coated RAL 9010 white gloss 15
- Double 45° wall sign in accordance with Council Directive 92/58/EEC
- NOHA installation instructions


Model	Hose length in metres		Dimensions in mm W x H x D	Order number
	19 mm	25 mm		
31SW SST	20		1105 x 795 x 230	555140
31SW SST	25		1105 x 795 x 230	555141
31SW SST	30		1105 x 795 x 230	555142
31SW SST		20	1105 x 795 x 285	555143
31SW SST		25	1105 x 795 x 285	555144
31SW SST		30	1105 x 795 x 285	555145

OPTIONS

- Doors and frame polished stainless steel
- Doors and frame brushed stainless steel for vision panel
- Doors and frame polished stainless steel for vision panel
- Full vision panels
- Compartment door for manual call point
- Hinges on left hand side
- Red hose
- Light hose



• NOHA MODEL 31SWA SST

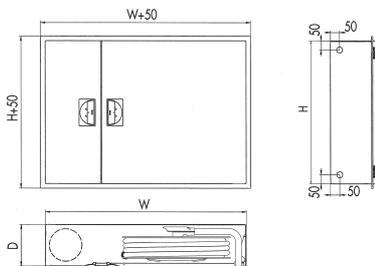

NOHA SWINGING FIRE HOSE REEL WITH AUTOMATIC STOP VALVE AND CABINET WITH EQUIPMENT COMPARTMENT FOR RECESS-MOUNTING, DOOR AND FRAME BRUSHED STAINLESS STEEL

Hose reel mounted on a swinging arm with internal waterways which swings 180°. The reel can easily be removed to facilitate the installation. The automatic stop valve opens to provide full capacity within just two revolutions of the reel.

For use in office buildings, schools, hospitals, kindergartens, sports arenas, cinemas, hotels and conference centres, airports and shopping centres.

NOHA MODEL 31SWA SST IS CE-MARKED ACCORDING TO EN671-1 AND SUPPLIED WITH:

- Hose reel with side discs powder coated RAL 3001 red gloss 15
- Integrated NOHA automatic stop valve
- NOHA quick-change coupling system on reel outlet
- NOHA jet/spray/shut-off nozzle
- NOHA special black hose, designed to standard EN694 for fire hose reels
- NOHA swinging arm with internal waterways
- Centre parts made of brass
- Adjustable brake
- Hinges on right hand side
- Doors and frame brushed stainless steel
- NOHA door catches/release handles
- Ø35 mm knockouts for inlet pipework on 3 sides
- Removable back wall, made of galvanized steel; can be used as a mounting template
- Cabinet and back wall powder coated RAL 9010 white gloss 15
- Double 45° wall sign in accordance with Council Directive 92/58/EEC
- NOHA installation instructions

Model	Hose length in metres		Dimensions in mm W x H x D	Order number
	19 mm	25 mm		
31SWA SST	20		1105 x 795 x 230	555146
31SWA SST	25		1105 x 795 x 230	555147
31SWA SST	30		1105 x 795 x 230	555148
31SWA SST		20	1105 x 795 x 285	555149
31SWA SST		25	1105 x 795 x 285	555150
31SWA SST		30	1105 x 795 x 285	555151

OPTIONS

- Doors and frame polished stainless steel
- Doors and frame brushed stainless steel for vision panel
- Doors and frame polished stainless steel for vision panel
- Full vision panels
- Compartment door for manual call point
- Hinges on left hand side
- Red hose
- Light hose

